SPECIFICATIONS
FOR
2024 PAVEMENT IMPROVEMENTS
ON VARIOUS STREETS
PROJECT NO. 9981

SALINAS
RICH IN LAND | RICH IN VALUES

CITY OF SALINAS
200 Lincoln Avenue
Salinas, CA 93901

JANUARY 2024

Kimbley Craig, Mayor

C. V. Gonzalez
T. Barrera
S. McShane

O. Osornio
A. Sandoval
A. Rocha

Jim Pia	Interim City Manager
Christopher A. Callihan Esq.	City Attorney
Patricia M. Barajas	City Clerk
David T. Jacobs, P.E., L.S.	Public Works Director
Adriana Robles, P.E.	City Engineer
Phavana Aramkul	Project Coordinator

For use in conjunction with STANDARD SPECIFICATIONS, DESIGN STANDARDS AND STANDARD PLANS, 2008 Edition, City of Salinas-Public Works Department, and 2018 State Standard Specifications and Standard Plans, and Additionally, the most current approved version of the California Manual of Uniform Traffic Control Devices (MUTCD) relating to signs and pavement markings.

APPROVED FOR CONSTRUCTION

Adriana Robles

Adriana Robles, P.E., C.F.M.
CITY ENGINEER
RCE 60986

1/5/2024
Date

TABLE OF CONTENTS

Section **Page No.**

LOCATION MAP **8**
NOTICE TO BIDDERS **10**

PART A – BID CONTRACT DOCUMENTS **14**

CONTRACT DOCUMENTS TO BE SUBMITTED WITH BID ON BID OPENING DATE **15**
PROPOSAL 16
BIDDER'S STATEMENT OF FINANCIAL RESPONSIBILITY, TECHNICAL ABILITY AND EXPERIENCE 26
NON-COLLUSION DECLARATION OF CONTRACTOR 27
INSURANCE CERTIFICATION 28
BIDDER'S STATEMENT OF SUBCONTRACTORS – PART I 29

CONTRACT DOCUMENTS TO BE SUBMITTED TO THE CITY WITHIN 5 WORKING DAYS AFTER BID OPENING DATE **30**
BIDDER'S STATEMENT OF SUBCONTRACTORS – PART II 32
NON-COLLUSION DECLARATION OF SUBCONTRACTOR 34
STATEMENT OF GOOD FAITH EFFORT FOR LOCAL HIRE 35
BIDDER'S LIST FOR THE CITY OF SALINAS PUBLIC WORKS DEPARTMENT 36

PART B – SUCCESSFUL BIDDER'S CONTRACT DOCUMENTS TO BE SUBMITTED AFTER PROJECT IS AWARDED **37**

GENERAL INSTRUCTIONS TO LOW BIDDER 38
PERFORMANCE BOND 40
PAYMENT BOND (LABOR AND MATERIAL BOND) 42
AGREEMENT 44
PUBLIC WORKS CONTRACT AWARD INFORMATION (D.A.S. 140) 51

PART C – CITY OF SALINAS FORMS AND MEMORANDUM DOCUMENTS **52**

STATEMENT OF COMPLIANCE 53
CITY OF SALINAS FRINGE BENEFIT STATEMENT 55
CITY OF SALINAS PUBLIC WORKS PAYROLL REPORTING FORM 56
LOCAL HIRING RESIDENCY COMPLIANCE DOCUMENTATION 57
PUBLIC WORKS DEPARTMENT BID PROTEST 58
CITY OF SALINAS NOTICE OF POTENTIAL CLAIM 59

PART D – SPECIAL PROVISIONS **60**

SECTION 1 SPECIFICATIONS AND PLANS **61**
SECTION 2 PROPOSAL REQUIREMENTS AND CONDITIONS **61**
2-1.01 GENERAL 61
2-1.02 EXAMINATION OF PLANS, SPECIFICATIONS, CONTRACT AND SITE OF WORK 62
2-1.03 BID PROTEST FEE 62
SECTION 3 AWARD AND EXECUTION OF CONTRACT **63**

SECTION 4 BEGINNING OF WORK, TIME OF COMPLETION, LIQUIDATED DAMAGES AND TEMPORARY SUSPENSION OF WORK **64**
SECTION 5 GENERAL **66**
5-1.01 LABOR NONDISCRIMINATION 66
5-1.02 WAGE DETERMINATION 67
5-1.03 DIR REGISTRATION 67
5-1.04 ENFORCEMENT OF CITY'S LOCAL HIRING ORDINANCE 68
5-1.05 WORK TO BE DONE BY OTHERS 68
5-1.06 PERMITS AND LICENSES 68
5-1.07 PARTIAL PAYMENTS AND RETENTION 68
5-1.08 COMPENSATION ADJUSTMENTS FOR PRICE INDEX FLUCTUATIONS FOR ASPHALT CONCRETE 69
5-1.09 INCREASE OR DECREASE QUANTITY 69
5-1.10 ITEMS NOT LISTED 69
5-1.11 LEGAL RELATIONS AND RESPONSIBILITY TO THE PUBLIC 69
5-1.12 INSPECTIONS AND CONTROL OF WORK 73
5-1.13 DISCREPANCIES 73
5-1.14 CLOSING OF UNINSPECTED WORK 73
5-1.15 ARBITRATION 74
5-1.16 NOTICE OF POTENTIAL CLAIM 74
5-1.17 CLAIMS 75
5-1.18 DELAYS 75
5-1.19 PUBLIC CONTRACTS CODE 9204 PUBLIC WORK PROJECT 75
5-1.20 COORDINATION AND COOPERATION 78
5-1.21 CONSTRUCTION EASEMENTS 78
5-1.22 GRAFFITI 79
5-1.23 PUBLIC SAFETY 79
5-1.24 AREAS FOR CONTRACTOR'S USE 79
SECTION 6 SAFETY AND HEALTH **79**
6-1.01 CONTRACTOR'S RESPONSIBILITY FOR SAFETY 79
6-1.02 SAFETY MEASURES 80
6-1.03 CONFINED SPACE SAFETY 80
6-1.04 PERSONAL HYGIENE 80
6-1.05 PUBLIC SAFETY AND CONVENIENCE 80
6-1.06 SOUND CONTROL REQUIREMENTS 81
6-1.07 WARNINGS AND BARRICADES 81
6-1.08 FIRE PREVENTION 81
6-1.09 SAFETY HELMETS, CLOTHING AND EQUIPMENT 81
6-1.10 HAZARDOUS AREAS 82
6-1.11 EMERGENCIES 82
6-1.12 SUBMITTALS 82
6-1.13 IMPLEMENTATION 82
6-1.14 PAYMENT 83
SECTION 7 (BLANK) **83**
SECTION 8 MATERIALS **83**
8-1.01 GENERAL 83
8-1.02 RELATIVE COMPACTION/MATERIAL TESTING 83
8-1.03 SUBSTITUTIONS 83
SECTION 9 DESCRIPTION OF PROJECT **84**

SECTION 10 CONSTRUCTION DETAILS 84
10-1.01 ORDER OF WORK 84
10-1.02 RECORD DRAWING 85
10-1.03 INSPECTION AND CONTROL OF WORK 85
10-1.04 FINAL INSPECTION AND CLEANUP 85
10-1.05 WORKMANSHIP 85
10-1.06 CONSTRUCTION SCHEDULE 85
10-1.07 SCHEDULE OF VALUES 85
10-1.08 UTILITY DETERMINATION 86
10-1.09 COORDINATION AND COOPERATION WITH UTILITY COMPANIES AND OTHER CONTRACTORS 87
10-1.10 UNDERGROUND OBSTRUCTIONS 87
10-1.11 EXAMINATION OF SITE 87
10-1.12 DEWATERING 87
10-1.13 WATERING 88
10-1.14 BLANK 88
10-1.15 MATERIAL TESTING 88
10-1.16 PROTECTION OF SITE AND PUBLIC SAFETY 88
10-1.17 DUST CONTROL 88
10-1.18 BLANK 88
10-1.19 EXISTING FACILITIES 88
10-1.20 TRAFFIC CONTROL 89
10-1.21 CHANGES IN WORK 91
10-1.22 PRESERVATION OF PROPERTY 91
10-1.23 MOBILIZATION 91
10-1.24 CLEAN UP 91
SECTION 11 ENVIRONMENTAL STEWARDSHIP 92
SECTION 11-1 GENERAL 92
SECTION 11-2 ENVIRONMENTAL/ POLLUTION PREVENTION REQUIREMENTS 92
SECTION 11-3 REMOVAL AND DISPOSAL/SALVAGE OF EXISTING FACILITIES . 98
11-3.01 GENERAL 98
11-3.02 REMOVAL OF ASBESTOS AND HAZARDOUS SUBSTANCES 98
SECTION 12 ITEMS OF CONSTRUCTION 99
SECTION 12-1 EARTHWORK 99
12-1.01 GENERAL 99
12-1.02 HAULING 99
12-1.03 UNSUITABLE MATERIAL 99
12-1.04 GRADE TOLERANCE 99
12-1.05 FINISHING ROADWAY 100
12-1.06 PAYMENT 100
SECTION 12-2 ROADWAY PAVING 100
SECTION 12-3 ASPHALT CONCRETE 100
12-3.01 GENERAL 100
12-3.02 AGGREGATE BASE 101
12-3.03 PRIME COAT 102
12-3.04 PAINT BINDER 102
12-3.05 SAWCUT PAVEMENT 102
12-3.06 CONCRETE PAVEMENT 102
12-3.07 TACK COAT 102

12-3.08 ASPHALTIC EMULSION 102
12-3.09 PAYMENT 103
SECTION 12-4 PAVEMENT DIGOUT & REPAIR 103
12-4.01 GENERAL 103
12-4.02 PAYMENT 105
SECTION 12-5 BLANK 105
SECTION 12-6 MISCELLANEOUS CONCRETE FACILITIES 105
12-6.01 GENERAL 105
12-6.02 SAWCUTTING 106
SECTION 12-7 RECONSTRUCTION OF ASPHALT CONCRETE PAVEMENTS BY FULL-DEPTH REHABILITATION (FDR) (PORTLAND CEMENT) 106
12-7.01 GENERAL 106
12-7.02 CEMENT APPLICATION RATE 107
12-7.03 CONTRACTOR'S QUALIFICATIONS 107
12-7.04 PROTECTION OF EXISTING UTILITIES 107
12-7.05 EQUIPMENT 107
12-7.06 PREPARATION OF EXISTING PAVEMENT 108
12-7.07 PORTLAND CEMENT APPLICATION 108
12-7.08 MIXING AND HYDRATING 109
12-7.09 CONSTRUCTION JOINTS 109
12-7.10 COMPACTION 109
12-7.11 FINAL GRADING 110
12-7.12 TRAFFIC LOADING 110
12-7.13 CURING 110
12-7.14 REPAIR 111
12-7.15 MEASUREMENT AND PAYMENT 111
SECTION 12-8 TREE ROOT DIGOUT AND TRIMMING 111
12-8.01 PAYMENT 112
SECTION 12-9 TREE ROOT DIGOUT AND REPAIR 112
12-9.01 GENERAL 112
12-9.02 PAYMENT 113
SECTION 12-10 CRACK TREATMENT 113
SECTION 13 SIGNAGE, RAISED PAVEMENT MARKERS, PAVEMENT MARKINGS, AND PAVEMENT STRIPING 113
SECTION 13-1 SIGNAGE 113
13-1.01 GENERAL 113
13-1.02 TRAFFIC SIGNS 113
SECTION 13-2 RAISED PAVEMENT MARKERS 114
13-2.01 GENERAL 114
13-2.02 PAYMENT 114
SECTION 13-3 THERMOPLASTIC PAVEMENT STRIPING AND PAVEMENT MARKINGS 115
13-3.01 GENERAL 115
13-3.08 WARRANTY 118
13-3.09 THERMOPLASTIC AND/OR PAINT REMOVALS 118
13-3.10 THERMOPLASTIC STRIPING AND PAVEMENT MARKING MATERIAL 118
13-3.11 SHARED LANE MARKING 124
13-3.12 GREEN THERMOPLASTIC STRIPING 124

13-3.13 PAYMENT 125
SECTION 14 MEASUREMENT AND PAYMENT 125
SECTION 15 FINAL CLEANUP 126

PART E: CITY OF SALINAS QUALITY ASSURANCE PROGRAM 127

PART F: EROSION AND SEDIMENT CONTROL 129

APPENDIX A: CONSTRUCTION SITE BEST MANAGEMENT PRACTICES AND CONSTRUCTION & DEMOLITION DIVERSION 129

PART G: CONSTRUCTION AND DEMOLITION WASTE REDUCTIONAND RECYCLING 135

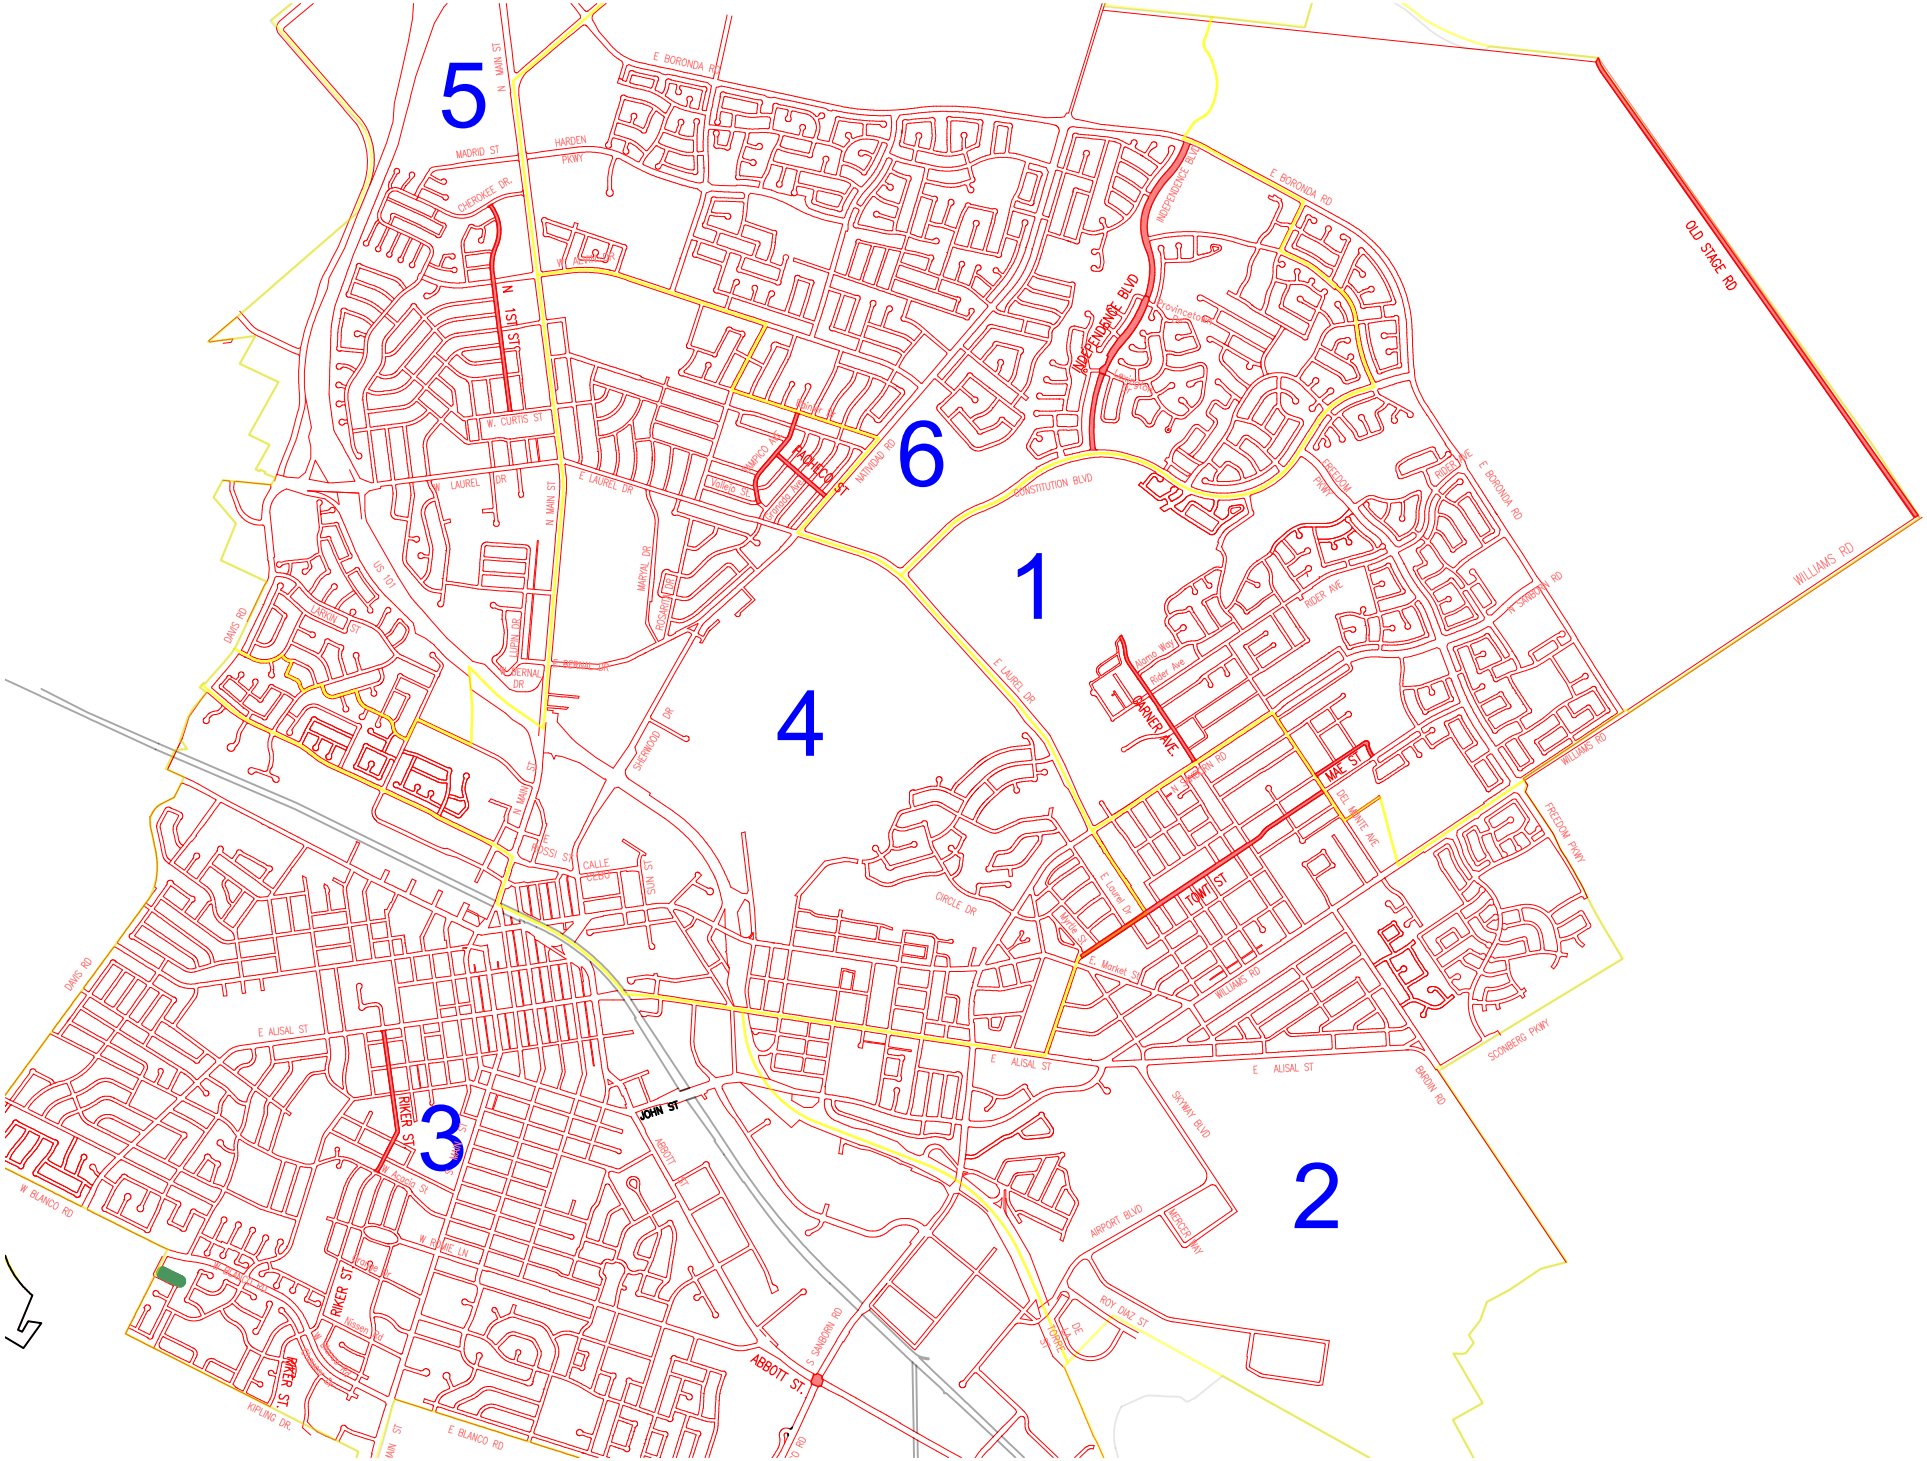

LOCATION MAP